

# DYMO®

## XTL™

Industrial Labelling Solution



**SIMPLIFIES THE MOST COMPLEX LABELLING.**



This product guide contains  
RS Stock Numbers

**DYMO®**

**XTL™**

**WE BET YOU'VE NEVER EXPERIENCED INDUSTRIAL LABELLING THIS SIMPLE.**

Jobsite tested and packed with features, the DYMO® XTL™ 300 and XTL 500 label makers help simplify industrial labelling for a more efficient, frustration-free experience. By incorporating cues from today's technology, XTL label makers offer a familiarity that makes using them easy. That's why over 80% of people who used an XTL label maker for eight weeks without any training said it performed better than their current label maker\*. Built to meet your needs, DYMO XTL label makers offer the flexibility to print continuous tape, pre-sized labels, heat-shrink tubes and small format safety signage all from the same label maker. A full range of durable XTL labels are also available in a variety of materials and colours that fit with OSHA, ANSI and ISO colour standards for workplace communication and safety.

Read on to see how XTL label makers are redefining simplicity.

## **LIFE-LIKE ON SCREEN PRINT PREVIEW**

*and colour display shows exactly how labels will look when applied to cables, pipes, panels, and more*



\* Based on in-field use study

## BUILT-IN LABEL APPLICATIONS

*simply select an application from the Home screen to get started quickly*



## TOUCH SCREEN

*helps make label creation easier and faster*


(available only on XTL 500)



## PRE-LOADED LABEL TEMPLATES

create labels 3x faster\* and ensure perfect formatting to save time.

Also includes pre-set layouts for almost 100 patch panel models to eliminate size and spacing guesswork.

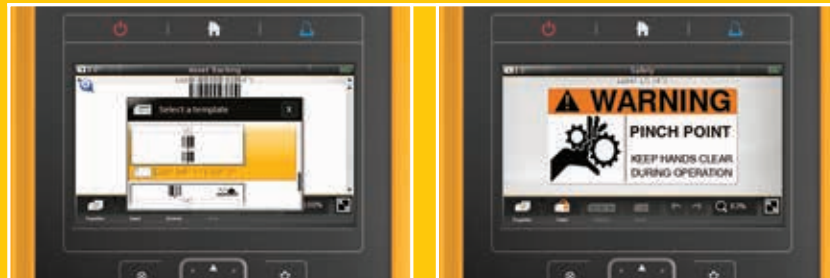

## ADDITIONAL FEATURES INCLUDE:

- 1 3-Year Limited Warranty + 1 additional year upon registering online
- 2 Maximised print area helps reduce label waste
- 3 PC-connectivity to easily transfer labels to and from DYMO ID software for jobsite editing and printing
- 4 FREE DYMO ID software adds even more capability to your XTL label maker
- 5 Durable built-in cutter for fast label production
- 6 Impact-resistant rubber bumpers and wipe-clean keypad withstands harsh environments
- 7 On-screen label indicator automatically detects and displays the loaded label
- 8 Customisable printer settings eliminate unnecessary menus and steps

[dymo.com](https://dymo.com)

\* when compared to creating labels on an XTL label maker without templates

# DYMO®



## DYMO® ID - ACHIEVING LABELLING SIMPLICITY JUST GOT EASIER.

Using DYMO ID is easy thanks to a uniform experience that integrates the same great features found on your XTL™ label maker and packs them into a powerful PC-based software package. Once you've used an XTL label maker, learning to use DYMO ID will be a breeze. Available as a free download from [dymo.com](http://dymo.com), DYMO ID will provide you with the functionality you need to tackle even the most complex labelling.

### QUICKLY IMPORT DATA

to create a series of labels in just a few steps to eliminate manual entry, saving time and increasing productivity



### OVER 200 PRE-LOADED SYMBOLS & IMAGES

or simply add a custom image to enhance communication and meet industry standards



### SHEET LABELS

Quickly print XTL label maker Laminated Wire/Cable Wrap sheet labels directly to a laser printer



### QUICK CUSTOMISATION & UPGRADES

Simply plug your XTL into a PC and use DYMO® ID software to customize your preferences and keep it up to date

### DYMO ID WORKS WITH THE FOLLOWING:

- XTL 300 Label Maker
- XTL 500 Label Maker
- XTL Laminated Wire/Cable Wrap Sheet Labels
- Works with Windows®7 and later

### AND

### NOW WITH FLUKE LINKWARE™:

Fully integrated with connectivity to Fluke Networks LinkWare™ Live, DYMO® ID labelling software and XTL label-makers offer a simplified solution for cable label creation.



- Quickly connect to LinkWare™ Live to access and view the most recent project data
- Import data from a LinkWare™ Live account in just a few steps to eliminate manual entry, saving time and increasing productivity
- Use Cable ID data with built-in label applications and time-saving templates for patch panels, wire/cable labels and more
- Life-like on screen print preview shows exactly how labels will look when applied to cables, panels and more
- Print directly or transfer labels to an XTL label-maker for editing and printing in the field



## Selection Guide



|                       | XTL™ 300                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | XTL™ 500                                                                                                                                                                                                                                                                                                                                                                                                          |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Printing System       | Thermal Transfer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Thermal Transfer                                                                                                                                                                                                                                                                                                                                                                                                  |
| Max Label Width       | 24 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 54 mm                                                                                                                                                                                                                                                                                                                                                                                                             |
| Labels Supported      | DYMO XTL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | DYMO XTL                                                                                                                                                                                                                                                                                                                                                                                                          |
| Display               | 71.12 mm Colour                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 109.22 mm Colour Touch Screen                                                                                                                                                                                                                                                                                                                                                                                     |
| Print Speed (average) | 23 mm/sec                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 28 mm/sec                                                                                                                                                                                                                                                                                                                                                                                                         |
| Keyboard              | QWERTY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | QWERTY                                                                                                                                                                                                                                                                                                                                                                                                            |
| Print DPI             | 300                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 300                                                                                                                                                                                                                                                                                                                                                                                                               |
| Printable Lines       | 11                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 24                                                                                                                                                                                                                                                                                                                                                                                                                |
| Barcodes Supported    | Code 128 (Auto), Code 39, Code 39 Mod 43, EAN8, EAN13, UPC-A, Codabar, PDF-417, QR Code                                                                                                                                                                                                                                                                                                                                                                                                                                           | Code 128 (Auto), Code 39, Code 39 Mod 43, EAN8, EAN13, UPC-A, Codabar, PDF-417, QR Code                                                                                                                                                                                                                                                                                                                           |
| Serialization         | Yes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Yes                                                                                                                                                                                                                                                                                                                                                                                                               |
| Cutter                | Manual, Replaceable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Auto, Replaceable                                                                                                                                                                                                                                                                                                                                                                                                 |
| Power Supply          | Rechargeable Lithium Polymer Battery or AC Adapter                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Rechargeable Lithium Polymer Battery or AC Adapter                                                                                                                                                                                                                                                                                                                                                                |
| Memory                | 41 MB                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 41 MB                                                                                                                                                                                                                                                                                                                                                                                                             |
| Warranty              | 3 + 1 Year Limited                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 3 + 1 Year Limited                                                                                                                                                                                                                                                                                                                                                                                                |
| PC Connectivity       | YES                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | YES                                                                                                                                                                                                                                                                                                                                                                                                               |
| Software              | DYMO ID, free download                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | DYMO ID, free download                                                                                                                                                                                                                                                                                                                                                                                            |
| Compatibility         | Windows® 7 and later                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Windows® 7 and later                                                                                                                                                                                                                                                                                                                                                                                              |
| Pack Contents         | <ul style="list-style-type: none"> <li>• DYMO XTL 300 Label Maker</li> <li>• AC Charging Adapter</li> <li>• USB Cable</li> <li>• Rechargeable Lithium Polymer Battery</li> <li>• (1) 24 mm x 7 m All-Purpose Vinyl, Black/White</li> <li>• Lanyard</li> <li>• Quick Start Guide</li> <li>• Software Download Card</li> </ul> <p><b>Kit includes everything above, plus:</b></p> <ul style="list-style-type: none"> <li>• Carrying Case</li> <li>• (1) 21 mm x 39 mm Laminated Wire/Cable Wrap, Black/White, 150 labels</li> </ul> | <ul style="list-style-type: none"> <li>• DYMO XTL 500 Label Maker</li> <li>• Carrying Case</li> <li>• AC Charging Adapter</li> <li>• USB Cable</li> <li>• Rechargeable Lithium Polymer Battery</li> <li>• (1) 54 mm x 7 m All-Purpose Vinyl, Black/White</li> <li>• (1) 38 mm x 39 mm Laminated Wire/Cable Wrap Black/White, 150 labels</li> <li>• Quick Start Guide</li> <li>• Software Download Card</li> </ul> |

| LABEL APPLICATIONS    |   |   |
|-----------------------|---|---|
| 110 & Terminal Blocks | ✓ | ✓ |
| Arc Flash             |   | ✓ |
| Asset Tracking        | ✓ | ✓ |
| Breaker               | ✓ | ✓ |
| Cable Wrap            | ✓ | ✓ |
| Distribution Panel    | ✓ | ✓ |
| Flag                  | ✓ | ✓ |
| General Label         | ✓ | ✓ |
| Heat-Shrink Tube      | ✓ | ✓ |
| Materials Management  | ✓ | ✓ |
| Patch Panel           | ✓ | ✓ |
| Pipe Marking          |   | ✓ |
| Quick Label           | ✓ | ✓ |
| Safety                |   | ✓ |

**DYMO®**

**XTL™**

**THE RIGHT LABEL**






**MORE VERSATILITY.**



**DELIVERING VERSATILITY AND DURABILITY, NO MATTER WHAT THE TASK.**

DYMO XTL™ labels are durable and made for a variety of surfaces. Whether you are labelling to OSHA, ISO and ANSI colour standards or labelling in harsh conditions, DYMO XTL labels have you covered. Jobsite-tested and UL-recognised, these labels won't smear or fade. Compatible with DYMO XTL label makers.

**ONE LABEL SYSTEM. COUNTLESS APPLICATIONS.**



**RECOMMENDED APPLICATIONS:**

**DYMO XTL 300**

General Identification  
Barcodes (1D and 2D)  
Asset Tracking  
Wire and Cable Identification  
Networking Components Identification  
Facilities Identification

**DYMO XTL 500**


General Identification  
Barcodes (1D and 2D)  
Asset Tracking  
Data Communications Identification  
MRO / Facilities Identification & Communication



## XTL LABELS

Industrial-strength labels withstand the toughest conditions – moisture, chemicals, a wide range of temperatures, UV light and more.

- Durable thermal transfer printing technology – label text won't smear or fade
- Easy-to-peel split back design and pre-sized labels make applying labels quick and easy



### ALL-PURPOSE VINYL

- Moisture, chemical and UV resistance makes vinyl ideal for indoor/outdoor use
- Wide range of colours that fit with OSHA, ANSI and ISO colour standards to enhance workplace communication and safety
- UL recognised as a component to UL 969



### FLEXIBLE CABLE WRAPS

- For labelling wires, cables and rounded surfaces, flexible nylon material is designed to conform and stick
- Tear-proof material resists damage when pulled through tight spaces or conduits
- UL recognised as a component to UL 969



### LAMINATED WIRE/CABLE WRAPS

- Pre-sized wire/cable wraps with laminated overwrap protect printed areas from oil, chemicals, moisture, abrasion and fading
- Also available in sheet label formats for high-volume installations
- UL recognised as a component to UL 969



### PRE-SIZED SAFETY LABELS

- Specific labels with coloured headers including labels pre-printed with DANGER and NOTICE headers for on-demand printing of small format safety signage
- UL recognised as a component to UL 969



### PERMANENT FLAT SURFACE

- For labelling panels, blocks, faceplates, shelves, bins, beams and more
- For labelling flat surfaces, a glossy finish leaves a professional look
- UL recognised as a component to UL 969



### HEAT-SHRINK TUBES (CONTINUOUS AND PRE-SIZED)

- Heat-Shrink Tubes provide insulation when shrunk down and ensure a secure fit on wires and cables with a 3:1 shrink ratio
- Meets MIL-M-81531, MIL-STD-202G, SAE-DTL-23053/5 (Class 1 & 3)
- UL recognised as a component to UL 224




### PRE-SIZED LABELS

- Ideal for flat surface labelling like barcodes, faceplates, shelves, bins, beams and more
- Pre-Sized labels help facilitate batch label printing to improve productivity
- UL recognised as a component to UL 969

**DYMO®**

## ***XTL LABELS: A VISUAL GUIDE***

### LABEL WIDTHS

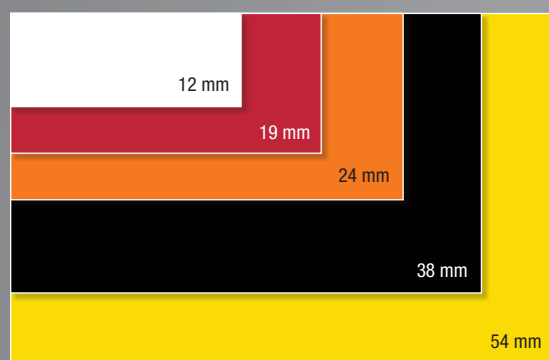


### ALL-PURPOSE VINYL COLOURS



### PRE-SIZED LABELS



**8931558**  
12 mm x 12 mm



**8931551**  
12 mm x 25 mm



**8931555**  
12 mm x 38 mm

### PRE-SIZED SAFETY LABELS



**8931612** /  
51 mm x 102 mm



**8931621** / 51 mm x 102 mm

### PRE-SIZED HEAT-SHRINK TUBE



**8931646** / 24 mm x 47 mm Black on White

### LAMINATED WIRE/CABLE WRAPS



**8931595** / 38 mm x 39 mm

### PERMANENT FLAT SURFACE



**8931652** / 9 mm Black on White

**12 mm DRILL BITS**

**8931662** / 12 mm Black on Clear

# THE RIGHT LABEL FOR THE RIGHT APPLICATION.

|                              |                                 | All-Purpose Vinyl                | Permanent Flat Surface | Flexible Cable Wrap | Heat-Shrink Tube<br>(continuous & pre-sized)               | Laminated Wire/Cable Wraps | Pre-Sized Labels | Pre-Sized Safety Labels                                          |
|------------------------------|---------------------------------|----------------------------------|------------------------|---------------------|------------------------------------------------------------|----------------------------|------------------|------------------------------------------------------------------|
| Surface                      | Flat                            | ✓                                | ✓                      | ✓                   |                                                            |                            | ✓                | ✓                                                                |
|                              | Wires & Cables                  | ✓                                |                        | ✓                   | ✓                                                          | ✓                          |                  |                                                                  |
|                              | Curved                          | ✓                                |                        | ✓                   |                                                            |                            |                  |                                                                  |
|                              | Flag                            | ✓                                |                        | ✓                   |                                                            |                            |                  |                                                                  |
|                              | Textured                        | ✓                                | ✓                      | ✓                   |                                                            |                            | ✓                | ✓                                                                |
| Resistance                   | Heat/Cold                       | -40° to 60° C                    | -40° to 60° C          | -40° to 60° C       | Max 125° C                                                 | -40° to 60° C              | -40° to 60° C    | -40° to 60° C                                                    |
|                              | Outdoor                         | ✓                                | ✓                      |                     |                                                            |                            | ✓                | ✓                                                                |
|                              | UV Light                        | ✓                                | ✓                      | ✓                   | ✓                                                          | ✓                          | ✓                | ✓                                                                |
|                              | Oil                             | ✓                                | ✓                      |                     | ✓                                                          | ✓                          | ✓                |                                                                  |
|                              | Water                           | ✓                                | ✓                      |                     | ✓                                                          | ✓                          | ✓                | ✓                                                                |
|                              | Chemical                        | ✓                                | ✓                      |                     | ✓                                                          | ✓                          | ✓                |                                                                  |
| Industry Standards & Ratings | Colour                          | OSHA, ANSI, ISO colour standards |                        |                     |                                                            |                            |                  | Coloured headers to comply with OSHA, ANSI, ISO colour standards |
|                              | UL Recognised as a component to | UL 969                           | UL 969                 | UL 969              | UL 224                                                     | UL 969                     | UL 969           | UL 969                                                           |
|                              | MIL-Spec & SAE                  |                                  |                        |                     | MIL-M-8153<br>MIL-STD-202G<br>SAE-DTL-230535 (Class 1 & 3) |                            |                  |                                                                  |
|                              | RoHS                            | ✓                                | ✓                      | ✓                   | ✓                                                          | ✓                          | ✓                | ✓                                                                |



# DYMO®



## CONTINUOUS & PRE-SIZED LABELS



All-Purpose Vinyl



Flexible Cable Wrap



Permanent Flat Surface



Heat-Shrink Tube (continuous)

| Text Colour on Label Colour | Length | 6 mm | 9 mm | 12 mm | 19 mm | 24 mm | 38 mm | 54 mm |
|-----------------------------|--------|------|------|-------|-------|-------|-------|-------|
|-----------------------------|--------|------|------|-------|-------|-------|-------|-------|

### ALL-PURPOSE VINYL

|     |     |   |   |         |         |         |         |         |
|-----|-----|---|---|---------|---------|---------|---------|---------|
| ABC | 7 m | - | - | 8931671 | 8931674 | 8931678 | 8931687 | 8931680 |
| ABC | 7 m | - | - | 8931684 | 8931693 | 8931696 | 8931690 | 8931700 |
| ABC | 7 m | - | - | 8931703 | 8931707 | 8931716 | 8931719 | 8931713 |
| ABC | 7 m | - | - | 8931722 | 8931725 | 8931729 | 8931738 | 8931731 |
| ABC | 7 m | - | - | 8931735 | 8931744 | 8931747 | 8931741 | 8931750 |
| ABC | 7 m | - | - | 8931753 | 8931757 | 8931766 | 8931769 | 8931763 |
| ABC | 7 m | - | - | 8931772 | 8931775 | 8931779 | 8931788 | 8931781 |
| ABC | 7 m | - | - | 8931785 | 8931794 | 8931797 | 8931791 | 8931801 |
| ABC | 7 m | - | - | 8931804 | 8931808 | 8931817 | 8931810 | 8931814 |
| ABC | 7 m | - | - | 8931823 | 8931826 | 8931820 | 8931839 | 8931832 |
| ABC | 7 m | - | - | 8931836 | 8931845 | 8931848 | 8931842 | 8931851 |
| ABC | 7 m | - | - | 8931854 | 8931858 | 8931867 | 8931860 | 8931864 |
| ABC | 7 m | - | - | 8931873 | 8931876 | 8931870 | 8931889 | 8931882 |

### PERMANENT FLAT SURFACE

|     |       |         |         |         |   |   |   |   |
|-----|-------|---------|---------|---------|---|---|---|---|
| ABC | 9.1 m | 8931659 | 8931652 | 8931656 | - | - | - | - |
| ABC | 9.1 m | 8931665 | 8931668 | 8931662 | - | - | - | - |

### FLEXIBLE CABLE WRAP

|     |       |   |   |         |         |         |   |   |
|-----|-------|---|---|---------|---------|---------|---|---|
| ABC | 5.5 m | - | - | 8931886 | 8931895 | 8931898 | - | - |
|-----|-------|---|---|---------|---------|---------|---|---|

### HEAT-SHRINK TUBE (CONTINUOUS)

|     |       |         |   |         |   |         |   |          |
|-----|-------|---------|---|---------|---|---------|---|----------|
| ABC | 2.7 m | 8931892 | - | 8931902 | - | 8931905 | - | 8931909* |
|-----|-------|---------|---|---------|---|---------|---|----------|

\*Tape length 1.8 m for #1868812 only



Heat-Shrink Tube  
(pre-sized)



Pre-Sized  
Labels



Pre-Sized  
Safety Labels



Laminated  
Wire/Cable Wraps



Laminated Wire/Cable Wraps  
(sheet labels)

| Text Colour on Label Colour | Item # | Label Width | Label Length | Labels / Cartridge | Compatible Label Maker |
|-----------------------------|--------|-------------|--------------|--------------------|------------------------|
|-----------------------------|--------|-------------|--------------|--------------------|------------------------|

#### PRE-SIZED HEAT-SHRINK TUBE

|     |         |       |       |    |         |
|-----|---------|-------|-------|----|---------|
| ABC | 8931624 | 6 mm  | 34 mm | 81 | XTL 500 |
| ABC | 8931628 | 12 mm | 34 mm | 65 | XTL 500 |
| ABC | 8931637 | 24 mm | 34 mm | 60 | XTL 500 |
| ABC | 8931630 | 54 mm | 34 mm | 25 | XTL 500 |
| ABC | 8931634 | 6 mm  | 47 mm | 81 | XTL 500 |
| ABC | 8931643 | 12 mm | 47 mm | 65 | XTL 500 |
| ABC | 8931646 | 24 mm | 47 mm | 60 | XTL 500 |
| ABC | 8931640 | 54 mm | 47 mm | 25 | XTL 500 |

#### PRE-SIZED LABELS

|     |         |       |       |     |                  |
|-----|---------|-------|-------|-----|------------------|
| ABC | 8931558 | 12 mm | 12 mm | 250 | XTL 300, XTL 500 |
| ABC | 8931551 | 12 mm | 25 mm | 250 | XTL 300, XTL 500 |
| ABC | 8931555 | 12 mm | 38 mm | 185 | XTL 300, XTL 500 |
| ABC | 8931564 | 25 mm | 25 mm | 250 | XTL 500          |
| ABC | 8931567 | 9 mm  | 25 mm | 250 | XTL 300, XTL 500 |
| ABC | 8931561 | 12 mm | 19 mm | 250 | XTL 300, XTL 500 |
| ABC | 8931570 | 19 mm | 25 mm | 250 | XTL 300, XTL 500 |
| ABC | 8931573 | 25 mm | 51 mm | 100 | XTL 500          |
| ABC | 8931577 | 51 mm | 76 mm | 100 | XTL 500          |

#### PRE-SIZED SAFETY LABELS (WITH COLOURED HEADERS)

|     |         |       |        |    |         |
|-----|---------|-------|--------|----|---------|
| ABC | 8931615 | 51 mm | 102 mm | 70 | XTL 500 |
| ABC | 8931618 | 51 mm | 102 mm | 70 | XTL 500 |
| ABC | 8931612 | 51 mm | 102 mm | 70 | XTL 500 |
| ABC | 8931621 | 51 mm | 102 mm | 70 | XTL 500 |

#### LAMINATED WIRE/CABLE WRAPS

|     |         |       |        |     |                  |
|-----|---------|-------|--------|-----|------------------|
| ABC | 8931586 | 21 mm | 21 mm  | 250 | XTL 300, XTL 500 |
| ABC | 8931589 | 21 mm | 39 mm  | 150 | XTL 300, XTL 500 |
| ABC | 8931583 | 21 mm | 102 mm | 75  | XTL 300, XTL 500 |
| ABC | 8931592 | 38 mm | 21 mm  | 250 | XTL 500          |
| ABC | 8931595 | 38 mm | 39 mm  | 150 | XTL 500          |
| ABC | 8931599 | 38 mm | 102 mm | 75  | XTL 500          |
| ABC | 8931609 | 51 mm | 21 mm  | 250 | XTL 500          |
| ABC | 8931602 | 51 mm | 39 mm  | 100 | XTL 500          |
| ABC | 8931606 | 51 mm | 102 mm | 70  | XTL 500          |

#### LAMINATED WIRE/CABLE WRAPS (SHEET LABELS)

| Text Colour on Label Colour | SKU #   | Label Width | Label Length | Labels/Sheet | Sheets/Pack | Labels/Pack |
|-----------------------------|---------|-------------|--------------|--------------|-------------|-------------|
| ABC                         | 8931918 | 24 mm       | 23 mm        | 96           | 27          | 2592        |
| ABC                         | 8931911 | 24 mm       | 42 mm        | 48           | 53          | 2544        |
| ABC                         | 8931915 | 24 mm       | 103 mm       | 16           | 63          | 1008        |
| ABC                         | 8931924 | 41 mm       | 23 mm        | 60           | 34          | 2040        |
| ABC                         | 8931927 | 41 mm       | 42 mm        | 30           | 34          | 1020        |
| ABC                         | 8931921 | 54 mm       | 23 mm        | 36           | 28          | 1008        |
| ABC                         | 8931930 | 54 mm       | 42 mm        | 18           | 56          | 1008        |

**dymo.com**

